

Thank you for purchasing **Auralex® Studiofoam®** high performance acoustical absorption treatment that can easily be mounted to walls & ceilings.

- Prior to mounting, mark desired panel locations on the wall with small pencil marks or masking tape.
- If you need to cut your Studiofoam, use a straightedge and an electric carving knife. Don't force the knife; let the blades do the work.

### EZ-Stick Pro™

Clean attachment points on the wall surface with Isopropyl alcohol (*avoid household cleaners*), wipe gently and let dry. Separate the **EZ-Stick Pro Tabs** from each other. Remove one of the paper release liners from the strip. Apply the tabs on the rear of the panel near the outside edges with heavy, uniform pressure (*heel of hand*). Orient vertically for maximum holding strength. Remove the second paper release liner from the backside of the tab, position the panel with the target location on the wall and press firmly to attach. Use 2 **Pro Tabs** for a 1' x 1' **Studiofoam** panel, 4 **Pro Tabs** for a 2' x 2' **Studiofoam** panel and 6 **Pro Tabs** for a 2' x 4' **Studiofoam** panel and all **LENRD®** bass traps.

### TubeTak Pro™ Adhesive & FoamTak™ Spray Adhesive

Both are contact adhesives, so wait a period of time (*see below*) after applying it to the back of the panel before trying to adhere the panel to the wall.

- **TubeTak Pro:** (*Gray color formulation.*) Requires a caulking gun for application. Refer to the diagrams to the right for recommended application patterns. To assure positive adhesion, surfaces must be clean, dry & free of foreign materials. New drywall must be primed & painted. Cut the tip off the threaded nozzle feature on the front of the tube. Cut 1" off of the end of the nozzle and screw it onto the front of the tube. Apply a continuous bead of adhesive approximately ¼" wide to the back of the foam about 1-1½" from the edges. Immediately flatten the applied beads of adhesive with a putty knife and apply the foam panel to the wall or ceiling. There is no need to wait for **TubeTak Pro** to tack up. Press firmly over the entire surface of the panel to achieve a proper bond. Visit **Auralex.com** for more information. **NOTE:** White color formulation, refer to package instructions.
- **FoamTak:** (*Orange color formulation.*) To assure positive adhesion, surfaces must be clean, dry & free of foreign materials. Aerosol spray can, US only. hold the can 3 to 5" away from the **Studiofoam** and apply uniform bands of adhesive. For best results apply to both surfaces, allow a minimum of 60 to 75 seconds to tack and then apply. Test periodically for tackiness with a knuckle. Firmly press the two surfaces together while the adhesive is still tacky. For a more temporary bond apply the **FoamTak** to one surface only. You can use the **Studiofoam** carton as spray shields for a cleaner installation. Stacking two **Studiofoam** cartons can be used as a convenient work surface. Visit **Auralex.com** for more information. **NOTE:** Clear formulation refer to package instructions.

### TEMP•Tabs™

**TEMP•Tabs:** A semi-permanent mounting kit that is a great way to temporarily install your **Studiofoam**. Removing the tabs causes some minimal damage to walls that may require spot repairs.

### Other Mounting Options


- T-Pins or Finish Nails can be used to tack the panels in place for a quick installation with minimal wall damage. Sometimes larger nails or panel movement can cause the foam to tear, so this is usually best as a temporary installation method. **NOTE:** Wall Installations only.
- **Studiofoam** can be mounted to a backing (*such as pegboard, Corex, cardboard, plastic, plywood, etc.*) before installing it on a wall. The assembly allows for added durability when relocating/repurposing **Studiofoam** panels.

### NOTES:

- **EZ-Stick Pro Tabs** may not adhere well to some vinyl wallpapers. Apply to surfaces above 50° F (10° C). Adhesive could soften and lose adhesion above 105° F (40° C). **EZ-Stick Pro Tabs** are considered permanent and will damage the wall surface when removed.
- Both **TubeTak Pro** and **FoamTak** are considered a permanent installation. Removing the panel after the adhesive has cured can result in some damage to the **Studiofoam** and the mounting surface. Try using a sharp knife to carefully separate the panel from the adhesive to minimize tearing. Use a citrus based adhesive remover to clean the adhesive from the wall. **Auralex** is not responsible for any damage to walls, the ceiling or the overall structure that occurs during installation or removal of our products.




EZ-Stick Pro™ Tabs shown

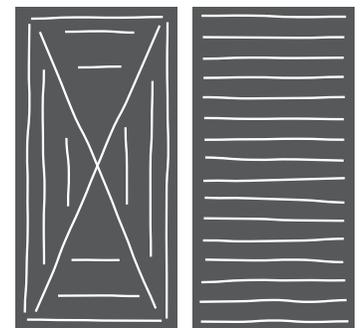

Typical TubeTak™ application pattern

TubeTak™ application for difficult to adhere to surfaces

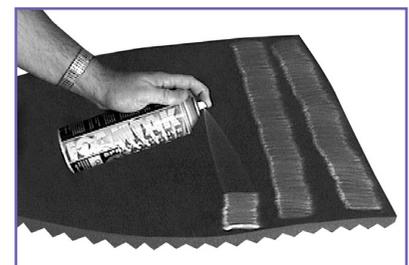

Application of Auralex® FoamTak™ shown



Auralex® TEMP•Tabs™ Shown