

ProPanel™ Ceiling Mount

Installation & User Guide



Application:

Mounting 1" - 2" thick ProPanel™ acoustical panels to ceilings.



Description:

This installation technique uses a metal plate with a continuous hanger bar screwed to the plate and a continuous Ceiling Hanger Bar screwed to the ceiling. Requires 3/4" of space.

Installation:

1. Use the 3/4" #8 Tek screws to attach the Ceiling Hanger Bar to the metal plate. See Detail 1.
2. Locate installation points of the Ceiling Hanger Bar on the ceiling by measuring the locations of the Ceiling Hanger Bar on the back of the panel. Install Ceiling Hanger Bar to the ceiling with appropriate fasteners. Allow 3/4" reveal.
3. Lift the panel in place and slide the clips together. All hanger bars must be fully engaged.
4. Install a safety clip at the panel end to hold it in place on the continuous hanger bars.

NOTE: Due to variations in fiberglass thickness, some shimming may be required to align the panel edges.

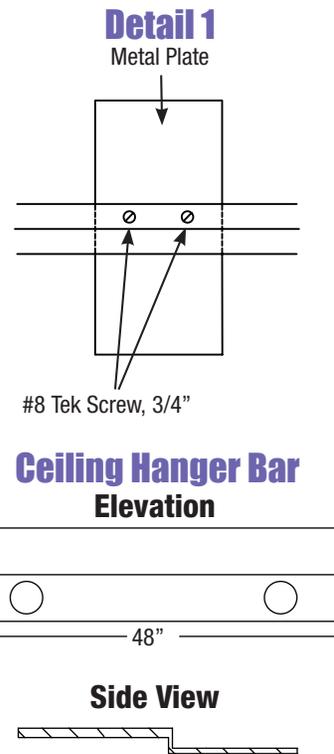
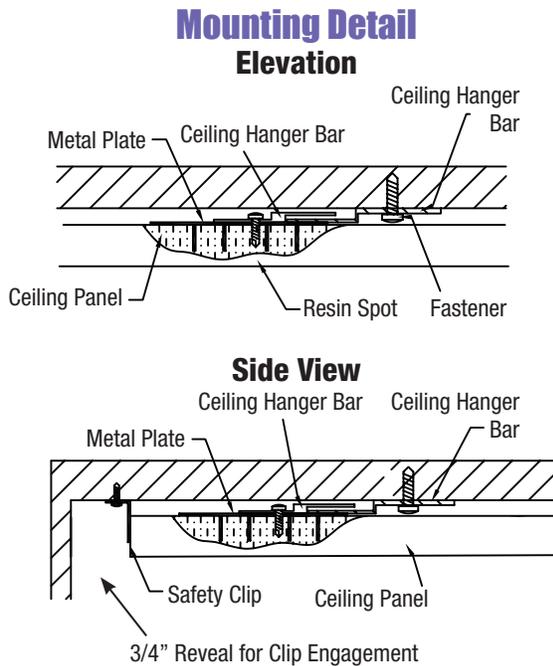


Auralex® Acoustics, Inc.

1-800-959-3343 | 317-842-2600 | Auralex.com
9955 Westpoint Drive, Suite 101, Indianapolis IN USA 46256

Real-World Acoustics®


Installation & User Guide

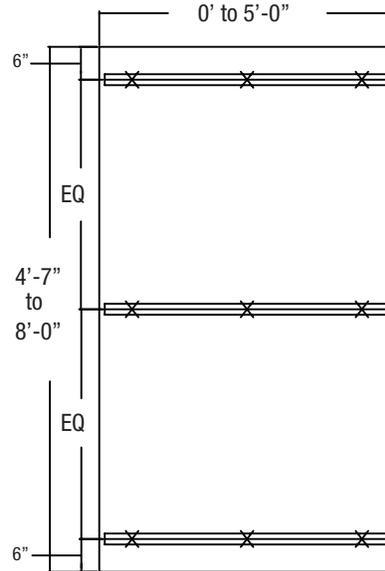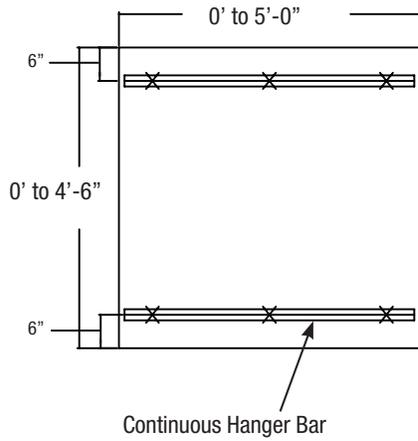

Ceiling Mounting Methods:

- For ceiling panels up to 4'x10' and 2" thick or less

x = metal plate

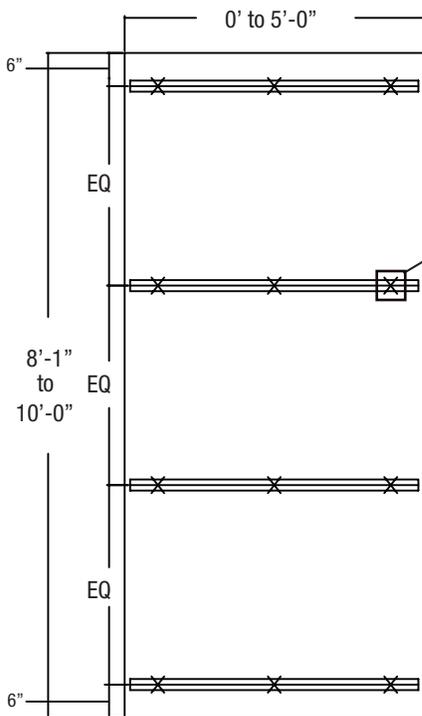

Detail 1

