


# SonoFlat™ Grid™



## FEATURES:

- ♦ Wall Mounted Acoustical Absorption Panels
- ♦ Reduce Unwanted Acoustical Reflections
- ♦ Tame Chaotic Reverberation
- ♦ Innovative Aesthetic at Home in Professional & Residential Settings
- ♦ Sturdy Melamine-free Formula That Won't Crumble

Based on our popular **SonoFlat™** absorber, the **Auralex® SonoFlat™ Grid™** measures 2' x 2' x 2" and is comprised of nine 8" x 8" beveled squares. Made from **Auralex's** proprietary and world-renowned **Studiofoam®**, these panels offer the impressive mid- and high-frequency absorption the original **SonoFlat™** panels are known for, as well as an elegant look that makes them a great addition to any studio, home theater or listening room.

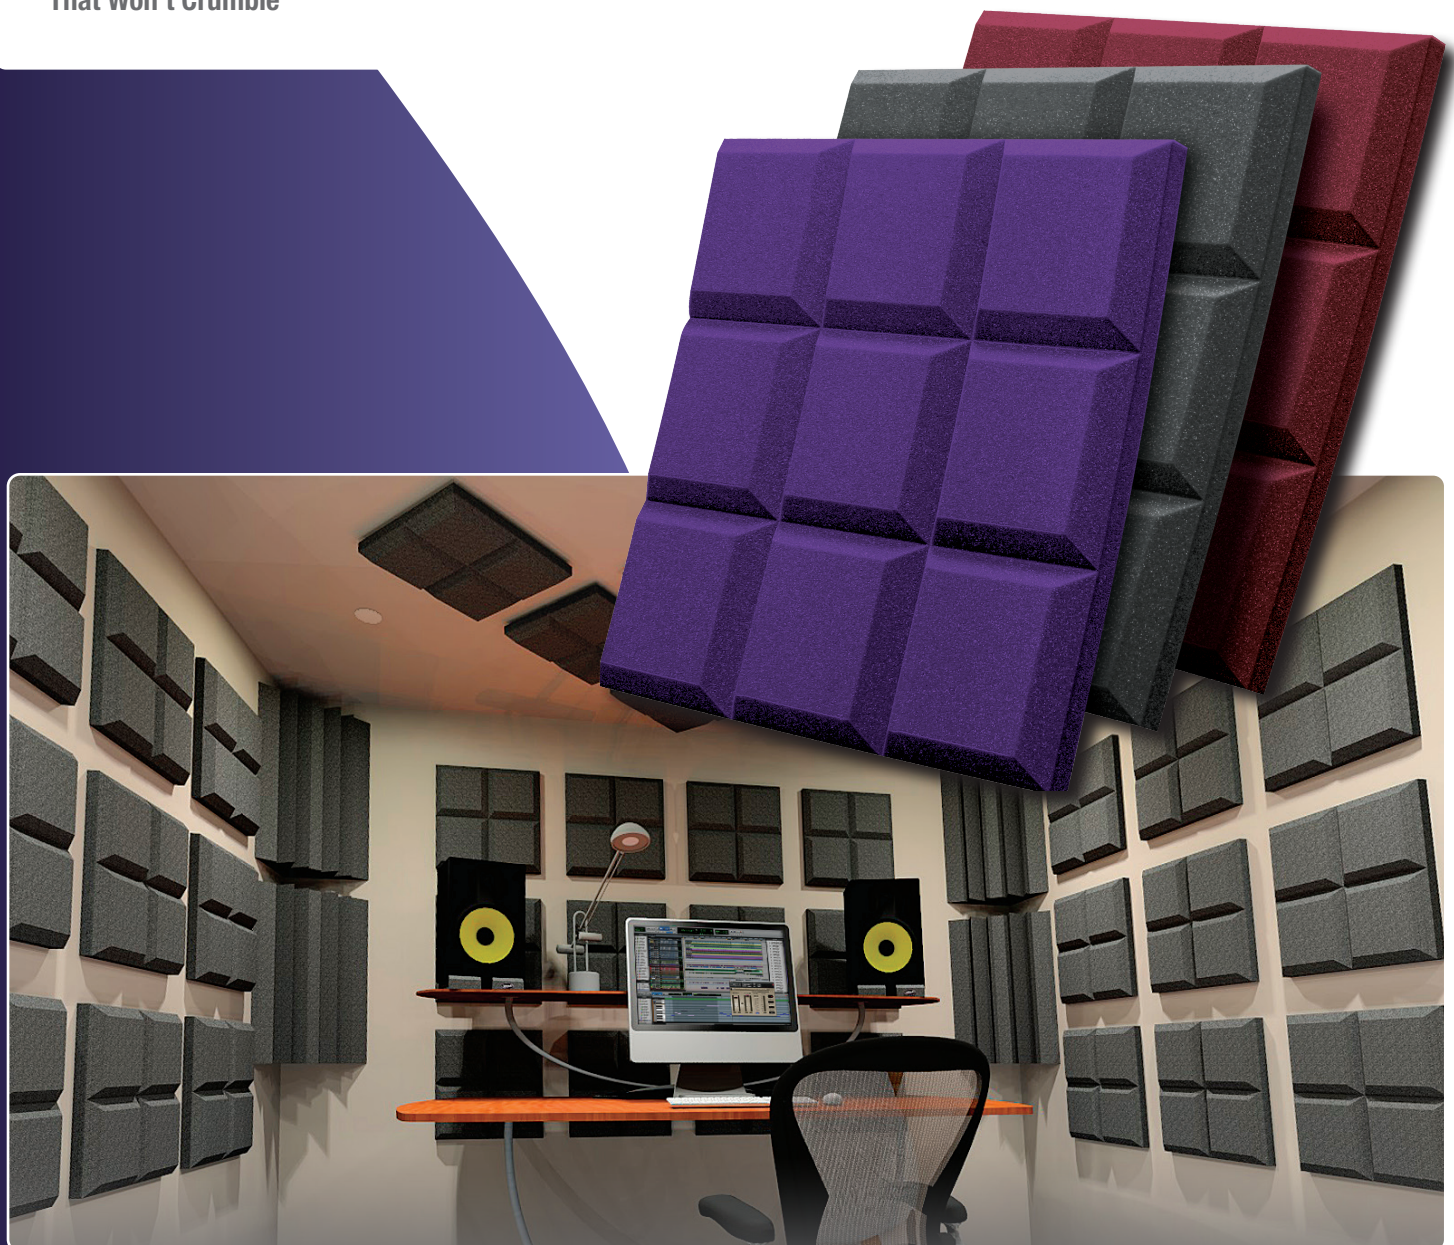

**Real-World Acoustics®**

**1-800-959-3343 / 317-842-2600**  
9955 Westpoint Drive, Suite 101, Indianapolis IN USA 46256


621-112.SonoFlat Grid Spec Sheet - TLS v10 (December 19, 2019 10:25 AM)



# SonoFlat™ Grid™

The new **SonoFlat™ Grid™** panel's unique design features nine 8" x 8" beveled squares, making them appropriate for a variety of professional and residential applications. The panels are available in three popular colors and are made from **Auralex's** long-lasting, melamine-free formula, which won't crumble with age.

The **Auralex® SonoFlat™ Grid™** was developed out of our clients' desires to have a price-conscious **Studiofoam®** solution with a completely unique, modern aesthetic appeal. This upscale product offers increased low-frequency absorption and a tasteful, seamless appearance.

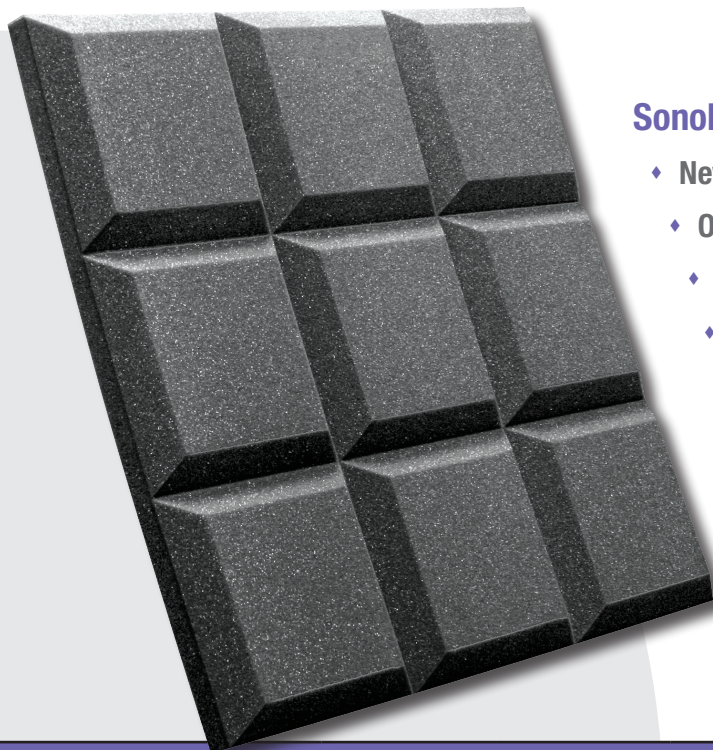

## SonoFlat™ Grid™

- ♦ New design based on original SonoFlat™ profile
- ♦ Overall NRC of 0.85
- ♦ Available in charcoal, purple & burgundy
- ♦ 2' wide x 2' long x 2" thick
- ♦ Easy Installation using Foamtak™ Spray Adhesive or Tubetak™ Pro Liquid Adhesive

### SonoFlat® Grid™ Product Specifications:

Dimensions	2' wide x 2' tall					
Thickness	Rises from 1" to 2"					
Available Colors	Charcoal, Burgundy & Purple					
Noise Reduction Coefficient (NRC)						
Frequency	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
Absorption Coefficients	0.29	0.35	0.98	1.03	0.96	0.96
Overall NRC	0.85					

All copyrightable materials are ©Copyright Auralex Acoustics, Inc. 1994-2020. Auralex, Total Sound Control and Real-World Acoustics are registered trademarks, and SonoFlat and SonoFlat Grid are trademarks, of Auralex Acoustics, Inc. All rights reserved. Proudly designed and manufactured in the USA.

**Real-World Acoustics®**

**1-800-959-3343 / 317-842-2600**  
9955 Westpoint Drive, Suite 101, Indianapolis IN USA 46256